

T70



MANUAL OPERATING MECHANISM



MAIN FEATURES

- Manual operating mechanism with local operation, for outdoor disconnectors with gang operated or one pole operated.
- For disconnector : Center break, double break, earthing switch.

TECHNICAL FEATURES

MECHANICAL

Based and operating lever made with hot dip galvanized steel operating lever

Operating lever with two horizontal handles

Length of lever 500 mm

Maximum force 450 N

Mechanical locking in «open» and «closed» position With padlock (padlock not supplied)

Rotating angle 180°

Output shaft stroke 190 mm


Weight 14 kg

OPTIONAL DEVICES

Auxiliary contacts	4NO + 4NC
	6NO + 6NC/8NO + 8NC
	Insulation level: 2 kV
	Rated current: 10 A
	Breaking capacity: 110 Vdc/1A
Heating resistance	Breaking capacity: 220Vdc/0,3A
	Breaking capacity: 220 Vac/2A
Electro-magnetic lock with or without push-button and with or without signalling lamp	230 Vac - 50/60 Hz
Locking with keylocks (keylocks not supplied)	
Box protection degree IP43 (with options above), with cable gland plates (to drill on site)	




OUTLINE DRAWING

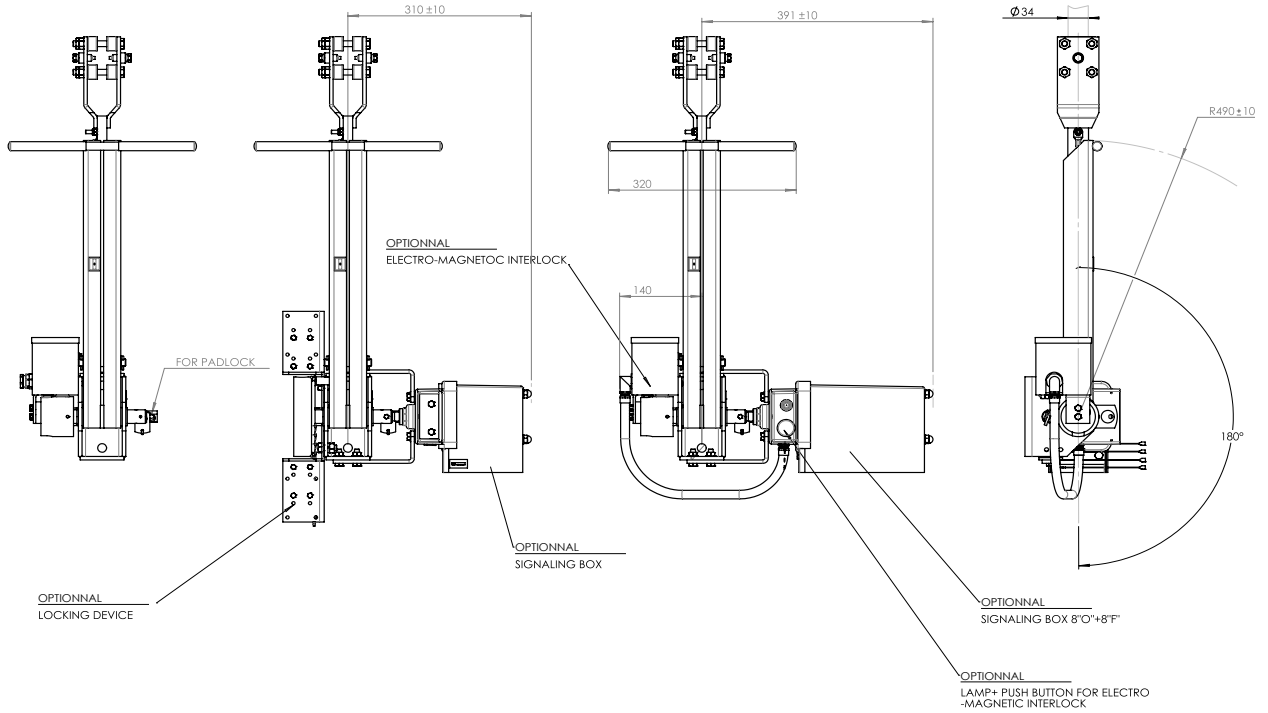


The drawing above is given for information only. Detailed layout and digital drawing available on request.


RELATED EQUIPMENT



SR16200
CENTER BREAK
DISCONNECTOR



SBE
VERTICAL BREAK
DISCONNECTOR



SBR
ROCKING
DISCONNECTOR



ST36001
EARTHING SWITCH



MR41R
ELECTRICAL
OPERATING DRIVE



MR41E
ELECTRICAL
OPERATING DRIVE